


COL

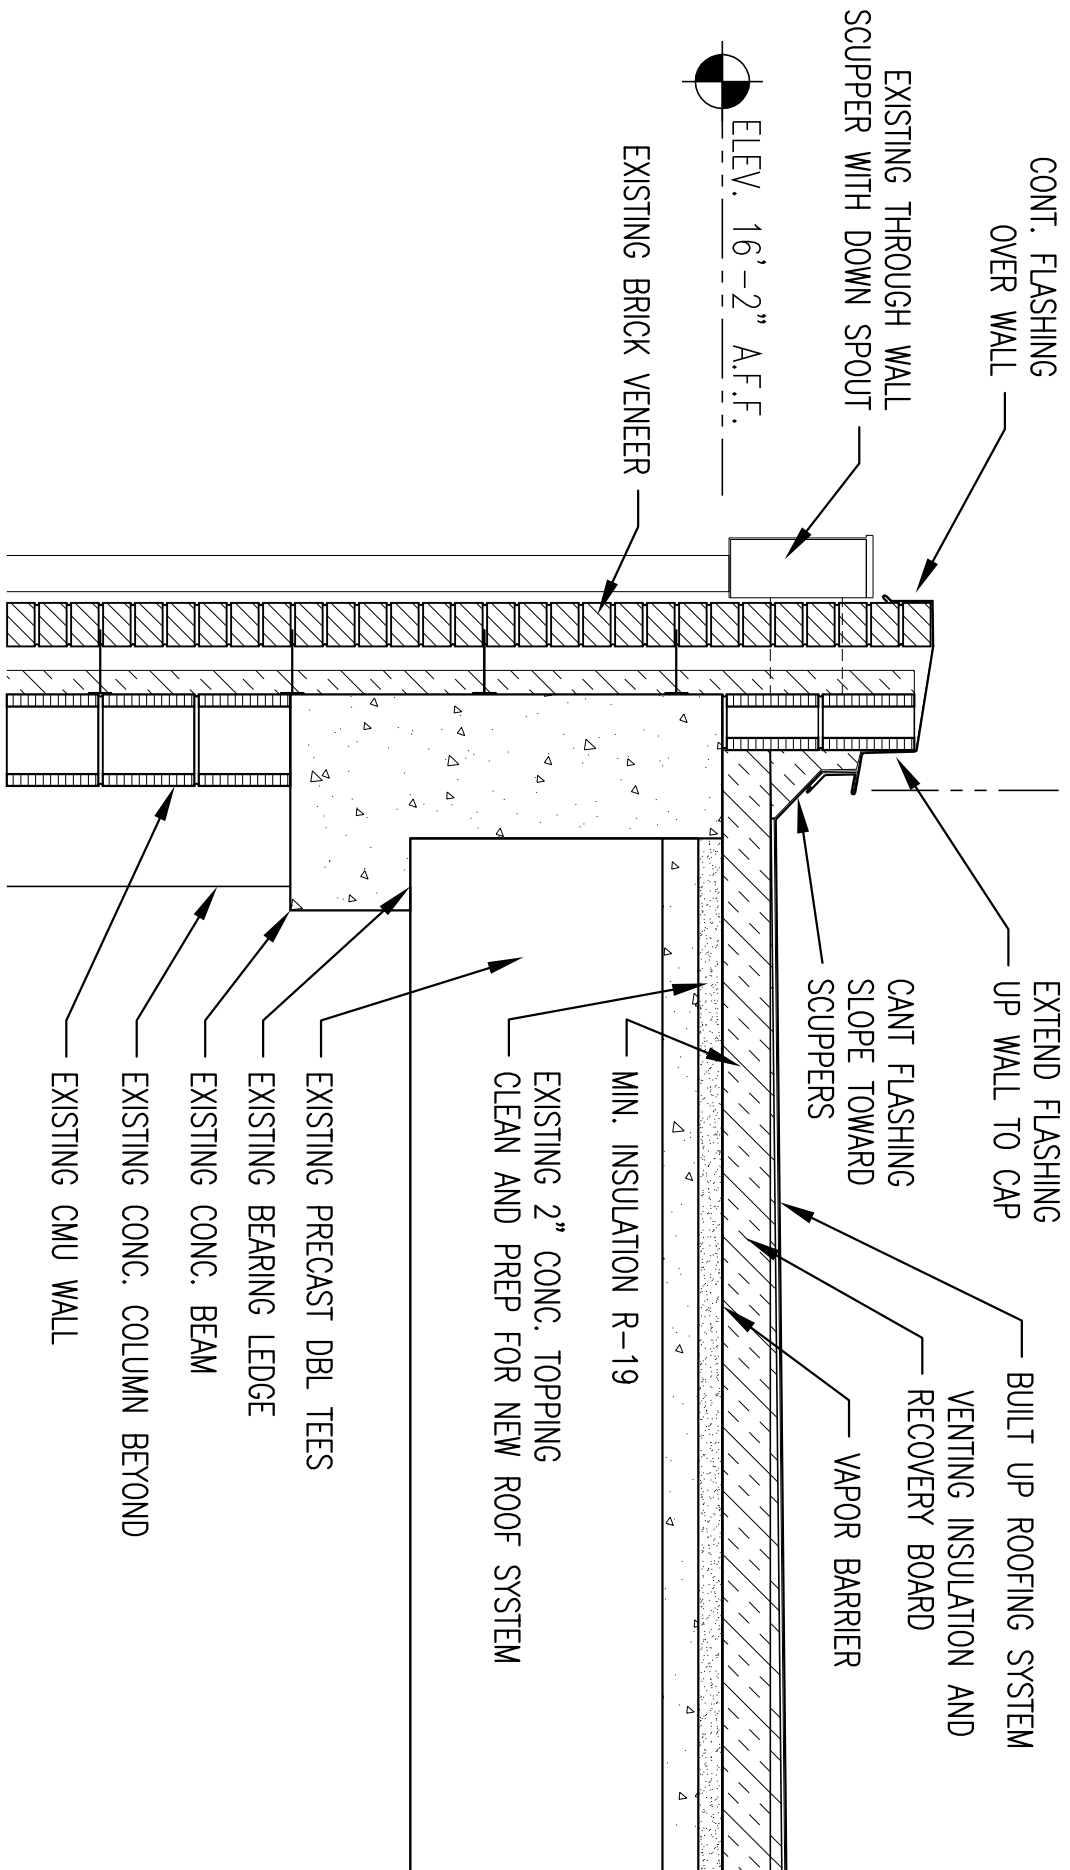

ROOF PLAN
1/8" = 1'-0"
B2
A2-1

RE-ROOFING SCOPE OF WORK:

REMOVE EXISTING ROOF MATERIALS, INSULATION, AND CAIMS. EXISTING GRAVEL STOPS, GUTTERS, AND DOWNSPOUTS ARE TO BE REMOVED TO THE EXTENT REQUIRED TO INSTALL THE NEW ROOF SYSTEM. RENSUAL THE EXISTING GRAVEL STOPS, GUTTERS, AND DOWNSPOUTS AFTER THE NEW ROOF IS INSTALLED.



PREPARE CONCRETE DECK TO RECEIVE NEW ROOF SYSTEM PER THE ROOFING MANUFACTURER'S RECOMMENDATIONS.

PROVIDE A BUILT UP ROOF SYSTEM PER SPECIFICATIONS. PROVIDE TAPERED INSULATION TO PROVIDE POSITIVE DRAINAGE TO THE EXISTING GUTTER SYSTEM.

KEYNOTE LEGEND:

- (KN-1) EXISTING ROOF SCUPPER DRAIN & DOWNSPOUT TO REMAIN
- (KN-2) EXISTING GAS LINE TO REMAIN PROVIDE NEW POLY FOAM PIPE SUPPORTS W/ STRUT CHANNEL & PIPE CLAMPS
- (KN-3) NEW BUILT UP ROOF SYSTEM
- (KN-4) PROVIDE A MIN. 10" VERTICAL BASE FLASHING WITH APPROPRIATE DEPTH STEP FLASHING ALONG PARAPET
- (KN-5) EXISTING ROOF TO REMAIN
- (KN-6) NEW STANDING SEAM METAL ROOF WITH GUTTER AND DOWNSPOUTS OVER TANK STORAGE SLOPE 1 : 12
- (KN-7) EXISTING MECHANICAL EQUIPMENT REFER TO MECH DRAWINGS
- (KN-8) NEW ROOF RIDGE LOCATION


COMPLEX KEY PLAN

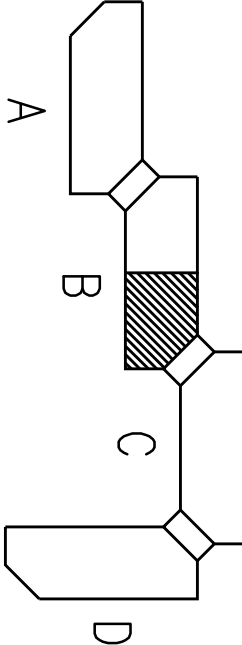



PLAN
NORTH

A2-1

P.O. BOX 6287
GREENVILLE, SC 29606
105 NORTH MAIN STREET
SUITE 200
GREENVILLE, SC 29601
(864) 681-8188
FAX (864) 623-9400
project@enwright.com
www.enwright.com



ENWRIGHT
ASSOCIATES, INC.





GREENVILLE TECH

College That Works

BARTON CAMPUS
INDUSTRIAL COMPLEX RENOVATION
STATE PROJECT NO: H59-9997-JM

NO.		DATE	REVISION
JOB NO.		09GTECWELDING	DATE 6/15/09
		DRAWN BY	JD