



A•smoke²⁰ Oil Smoke Filter

The Absolent type A•smoke²⁰ oil smoke filter features one of the most effective systems in the world for cleaning oil mist and oil smoke. The filter unit is being placed adjacent to one or several machines. The A•smoke²⁰ filter unit is designed for handling tough applications with air flows up to 2000m³/h.

The highest possible collecting efficiency.

The filtered air becomes so clean that it usually can be returned to the premises. This means less loss of energy and a more balanced ventilation.

Designed for oil smoke.

Oil smoke particles are very small, smaller than 1.0µm. Other filter types, as for example centrifugal filters, have difficulties with small particles. The Absolent filter unit is designed just for this purpose.


Extremely low maintenance.

Absolent filter units can usually run for at least one year without requiring a filter change. This results in a low total cost of ownership.

A very reliable filter unit.

The fan, as the only moving component, is placed at the clean-side to minimize wear & tear.

Extremely low noise level for agreeable working conditions.

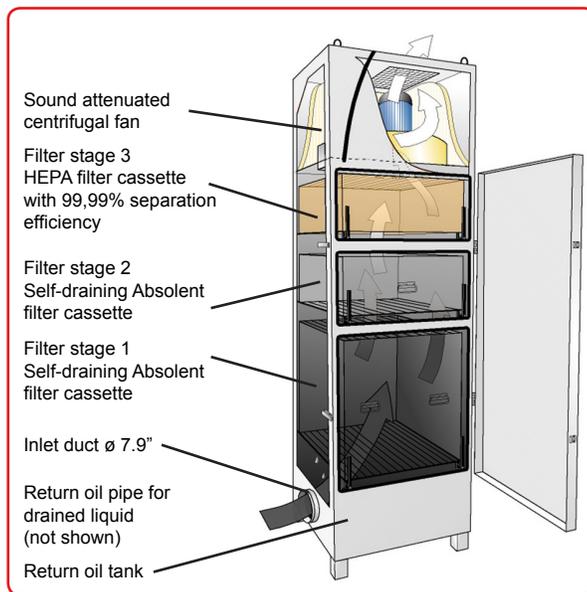

Operation

The filtering process is carried out in three stages. The process air passes first through a self-draining Absolent filter cassette. Here, the bigger part of the oil mist and smoke is arrested. When the filter is saturated, the liquid drops into the return oil tank. The air continues through another Absolent filter, where the rest of the bigger particles is arrested. The third stage consists of a HEPA filter which has a guaranteed consistent separation efficiency of 99.99%, collecting size 0.3 microns (mpps) particles. Every filter stage has a pressure gauge that indicates when a filter change is necessary. The Absolent A•smoke filter is geared to operate continuously without unnecessary shutdowns for draining. The return oil is collected at the bottom of the filter for recycling.

Range of Application

The Absolent A•smoke²⁰ is well suited for use in many fields of application. The filter unit is perfect for use in complicated installations where the operations can give rise to substantial impurity loads, such as:

- Rotary transfer machines (Hydromats)
- Grinding (high-speed)
- Minimal lubrication
- Hardening
- Milling & CNC turning involving straight oil lubrication.
- Gear cutting

Design

The A•smoke²⁰ has a highly robust tower design that occupies a minimum of floor space. Its hinged access door makes service very convenient. The filter is supplied with a baked powder painted finish.



Absolent Inc.


8601 Six Forks Road, Suite 400
Raleigh, NC 27615
Phone: +1 (919) 882 2075
Fax: +1 (919) 882 2087
E-mail: info@absolent.com

Unique filter cassettes



Absolent is one of few companies in this line of business that has specialized in the filtration of air containing wet particles. This has given us the opportunity to develop a filter cassette that offers a long useful life with consistently high collecting efficiency.

Sound level, dB(A)¹⁾

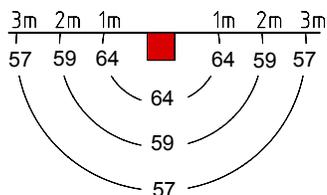

Technical Data

A•smoke²⁰

Max permissible air volume	[cfm]	1180
Sound level, 1m in front of filter unit ¹⁾	[dB(A)]	64
Weight (dry filters)	[lbs.]	617
Available dim. ext. pressure drop	[Pa]	430
Filter area, filter 1 (Absolent filter)	[ft ²]	123
Filter area filter 2 (Absolentfilter)	[ft ²]	146
Filter area, filter 3 (HEPA filter)	[ft ²]	219
Fan Data		
Motor output	[hp]	3.5
Power supply	[V]	440-480
Rated current (3-Phase, 400V)	[A]	4.6
Speed	[rpm]	3400

¹⁾ Sound absorption in premises = 2153ft², Hemispherical sound propagation. For sound calculation concerning a specific room, contact us at Absolent or any of our dealers.

Standard Equipment

- RAL 7035 fine structure
Other colours on request!
- Electronic manometer for reading the pressure drop across the filter cassettes.

Accessories




- Motor starter for fan. Either a manual or protective motor contactor (for automatic or external starting)
- Outlet hood
- Carbon filter
- Connection piece for various types of steel or plastic tubular ducts.

- Extension legs, (standard height 400 mm).
- Water trap for various connections of the return oil pipe.
- Pump unit for pumping the return oil from the filter.
- Sound insulation (-3 dB)
- Extra outlet silencers (-2 dB).
- Pressure monitor, for external alarm or alarm indications with LED
- Special colours
- Filter sledge for simple handling of used filter cassettes

Electronic manometer



- Pressure drop and operation hour meters
- Optical indication of filter alarm (LED).
- Digital output signal for remote supervision.

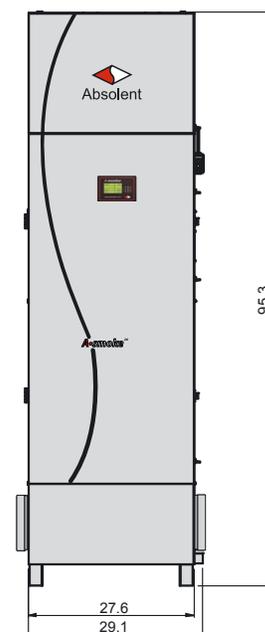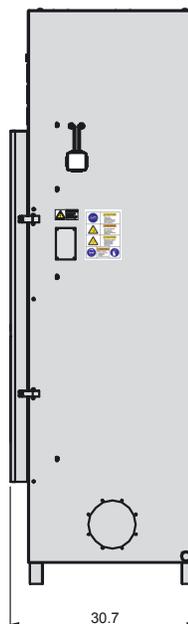

Absolent AB
Kartåsgatan 1
SE-531 40 Lidköping
Sweden
Tel: +46 (0)510-484000
Fax: +46 (0)510-484029
E-mail: info@absolent.se
Sweden • USA • China



Absolent Inc.
8601 Six Forks Road, Suite 400
Raleigh, NC 27615
USA
Phone: +1 (919) 882 2075
Fax: +1 (919) 882 2087
E-mail: info@absolent.com

Dealer: